


Agilent 8700 LDIR Chemical Imaging System

Bringing clarity and unprecedented speed to chemical imaging



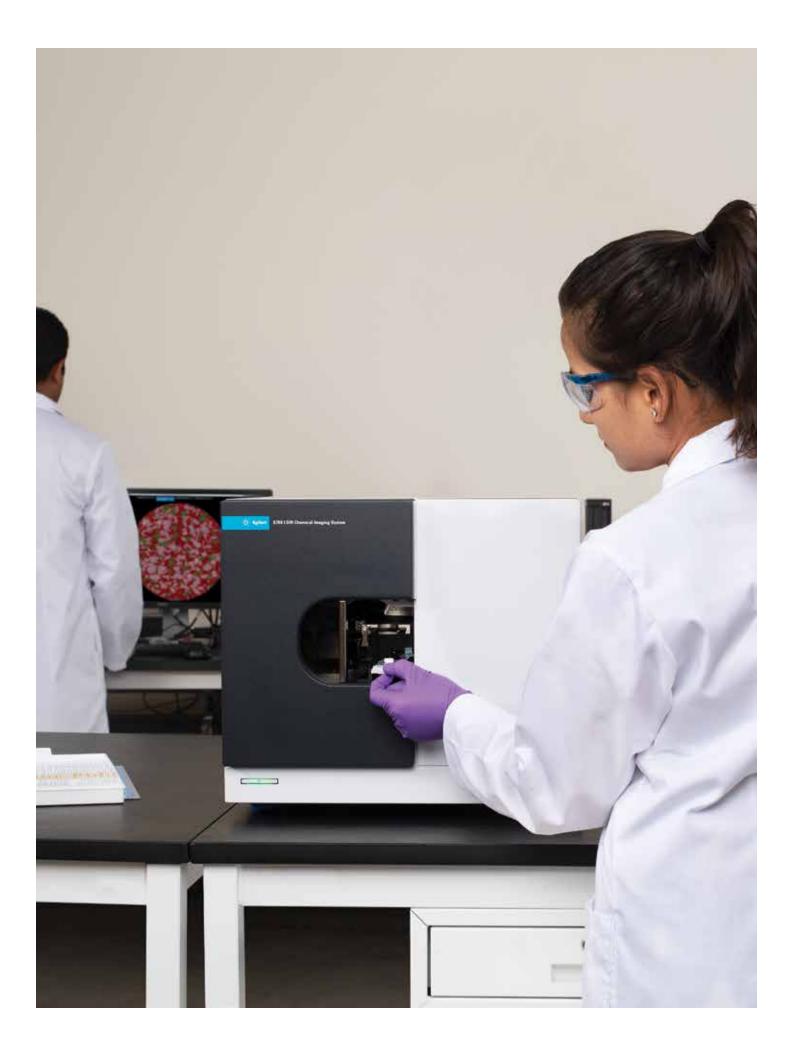

What If You Could Save Time And Achieve Better Results?

The Agilent 8700 laser direct infrared (LDIR) chemical imaging system provides a sophisticated new approach to chemical imaging and spectral analysis. Designed to be used by both experts and nonexperts alike, the 8700 LDIR provides a simple, highly automated approach for obtaining reliable high-definition chemical images of constituents on a surface.

The 8700 LDIR uses the latest quantum cascade laser (QCL) technology, coupled with rapidly scanning optics to provide fast, clear, high-quality images and spectral data. This technology is combined with intuitive Agilent Clarity software for rapid and detailed imaging of large sample areas with minimal instrument interaction via a simple load and go method.


The 8700 allows you to analyze more samples, in greater detail, in less time. This robust solution provides you with more statistical data than ever to aid in the compositional analysis of tablets, laminates, tissues, polymers, and fibers. With more meaningful information available, you can make more informed, faster decisions in product development—reducing both costs and analysis time.



 $(from\ left\ to\ right)\ the\ Agilent\ Sample\ Planer,\ Agilent\ 8700\ chemical\ imaging\ system,\ and\ Agilent\ Clarity\ software.$

LDIR Chemical Imaging - How It Works

The 8700 LDIR works in either reflectance or attenuated total reflectance (ATR) mode. It automatically switches between these two modes by directing the incident beam to the appropriate objective. The movement of the sample, relative to the beam, is also fully automated. The 8700 LDIR has two visible channels: a large field of view camera to obtain an entire view of the sample and a microscope grade objective to capture high magnification detail.

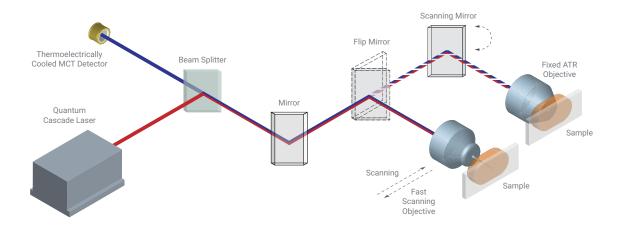

Infrared light from the QCL (shown in red) is directed to the sample. Infrared light reflected by the sample is then directed to the detector via either of the selected optical paths (shown in dark blue).

In reflectance mode (solid line), infrared light from the laser is focused by the fast scanning objective system that is rapidly scanned back and forth. Concurrently, the sample is automatically moved in a plan that is perpendicular to the incident light. This process yields a high-quality two-dimensional chemical image in a remarkably short time period.

In ATR mode (dashed line), infrared light from the laser is directed onto a scanning mirror that rapidly moves the light across the fixed ATR element, which is in contact with the sample.

8700 LDIR instrument optics

The key benefits

- Automated sample analysis
- Ability to survey large sample areas and then explore smaller areas of interest in more detail without changing any optics
- Full software control allows changing the field of view from microns to centimeters or the pixel size from 1 to 40 µm
- Acquire ATR imaging data with pixel size as small as 0.1 µm for unmatched image detail and spectral quality
- Rapidly identify unknowns using either commercial or custom libraries via ATR capabilities
- Determine the relative quantities of each chemical in the sample, without complex method development
- Low operating costs and maintenance as liquid nitrogen is not required

The Agilent 8700 LDIR Chemical Imaging System Handles Both Your Routine And Challenging Applications

The 8700 LDIR is ideal for a range of applications including pharmaceuticals, materials science and life science research.


Pharmaceutical


- Quickly obtain high resolution images of the spatial distribution of active pharmaceutical ingredients (APIs) and excipients in tablets. Such images are a powerful tool during formulation development and production troubleshooting.
- Investigation of factors affecting polymorphism, crystallization and salt exchange.
- Analysis of multi-layer tablets—monitor inter- and intra-layer consistency.
- Analysis of single and multilayer coatings for consistency.
- Correlation of drug formulations (chemical and physical structure) with dissolution studies.
- Identification of extraneous particles and impurities.
- Counterfeit drug analysis—create spectral and image databases of drug tablets to support anti-counterfeiting efforts.

Accelerate pharmaceutical drug development

Problems that arise during drug formulation studies take time and resources to resolve. With the 8700 LDIR, an entire tablet can be quickly and easily analyzed, speeding up your troubleshooting process.

Formulation studies are complex and critical processes. The 8700 LDIR system provides high sensitivity chemical composition analysis. With this system, you can now quickly and easily obtain qualitative and semi-quantitative information about APIs (polymorphs, salts), excipients, and impurities.

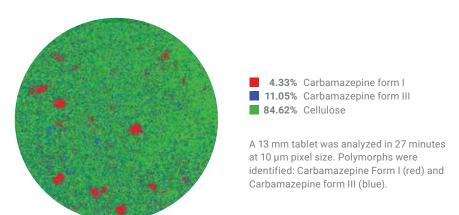

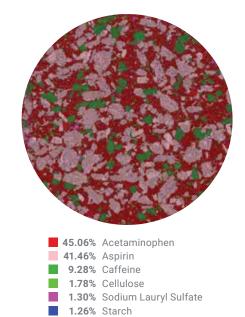


A high spatial resolution chemical image of a generic headache tablet consisting of three APIs (acetaminophen, aspirin and caffeine) and four excipients. All seven components were imaged across the entire tablet (11 mm diameter) with 10 micron pixel size in only 1 hour.

0.16% Hypomellose

Biomedical/Life science research


- High-quality imaging and infrared spectra of cells, tissues, cartilage, bone, and other biological materials.
- Rapidly survey specimens to find and then interrogate areas of interest.
- Analysis of biopolymer surfaces to further understand activity and support quality assurance.
- Find and identify defects, impurities, and extraneous particles in biopolymer matrices.

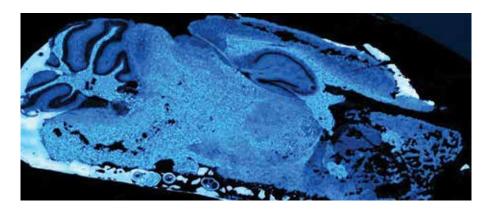

A chemical image of a mouse brain slice showing lipid distribution (12 mm × 7 mm) at 1 µm pixel size measured in 1 hour. Sample courtesy of Dr. Kathleen Gough, University of Manitoba, Canada

Materials science/polymer analysis

- Analyze packaging/laminates—rapidly image and determine layer identity and thickness for functional and tie (adhesive) layers, down to \sim 3 μ m.
- Rapidly identify defects within polymers and multilayer films.
- Analyze extraneous surface particles and impurities on materials including semiconductors and electronic components.
- Determine and identify the authenticity of components.

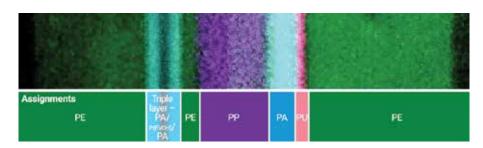

A chemical image showing layers of the laminate sample (120 μm wide) consisting of polyethylene (PE), polyamide (PA), poly (ethylene vinyl alcohol) (P(EVOH)), polypropylene (PP) and polyurethane (PU). The thinnest layer observed was only 2.6 μm thick.


Breakthrough IR Technology

Agilent's innovative design uses quantum cascade laser (QCL) light, high resolution spatial imaging, and the intuitive Agilent Clarity software to create detailed chemical images. Unlike other QCL imaging systems that use 2D focal plane array (FPA) detectors, the 8700 LDIR employs a single-element electrically cooled detector to eliminate laser coherence artifacts from images and spectra.

Automated. Intuitive. Fast.

Get images fast to allow quick decision making

The instrument control and software tools of the 8700 LDIR allow both expert spectroscopists and trained technicians to analyze and characterize samples rapidly and accurately. Simply load the sample in the instrument and allow Agilent's Clarity software to reveal complex statistical data in minutes.

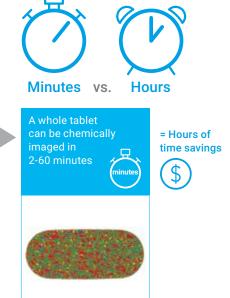








Agilent Clarity software

The Agilent Clarity software combines the high resolution data from the instrument with information from a spectral library. The software produces easy to understand, high fidelity, spatially-resolved images. These images show which chemicals are located where on the sample surface.

Key software features include:

- Fast, easy method creation.
- Spectral analysis including mathematical functions (e.g. variance, addition, averaging) and spectrum transformations.
- Create and search spectral libraries to identify compounds, or export spectra for use with other third party analysis software.



Simple report generation

Agilent Sample Planer

The Agilent Sampler Planer is used to create a flat surface of the sample, ready for analysis by LDIR. It can handle samples up to 25 mm (W) x 50 mm (L) x 18 mm (D). The maintenance-free planer does not require a power supply, and has a simple manual adjustment to control sample thickness.



Agilent CrossLab: Real insight, real outcomes

CrossLab goes beyond instrumentation to bring you services, consumables, and lab-wide resource management. So your lab can improve efficiency, optimize operations, increase instrument uptime, develop user skill, and more.



Learn more:

www.agilent.com/chem/8700-ldir

Buy online:

www.agilent.com/chem/store

Get answers to your technical questions and access resources in the Agilent Community:

community.agilent.com

U.S. and Canada


1-800-227-9770 agilent_inquiries@agilent.com

Europe

info_agilent@agilent.com

Asia Pacific

inquiry_lsca@agilent.com



For Research Use Only. Not for use in diagnostic procedures

This information is subject to change without notice.

