



Chlorinated hydrocarbons

Application Note

Environmental

Authors

Agilent Technologies, Inc.

Introduction

GC analysis of eight chlorinated hydrocarbons uses an Agilent FactorFour VF-200ms column to achieve a separation in 22 minutes.



Agilent Technologies


Conditions

Technique : GC
Column : Agilent FactorFour VF-200ms, 0.25 mm x 30 m
(df = 1.0 μ m) (Part no. CP8860)
Temperature : 45 °C, 3 min 10 °C/min \rightarrow 325 °C
Carrier Gas : Helium, ca. 1.0 mL/min
Pressure program : 60 kPa
Injector : Split/Splitless, in split mode, 1:100
Detector : MS
Sample Size : 1 μ L

Courtesy : Jan Peene, Agilent Application Laboratory,
Middelburg, The Netherlands

Peak identification

- 1,3-dichlorobenzene
- 1,4-dichlorobenzene
- hexachloroethane
- 1,2-dichlorobenzene
- hexachlorobutadiene
- 1,2,4-trichlorobenzene
- 2-chloronaphthalene
- hexachlorobenzene

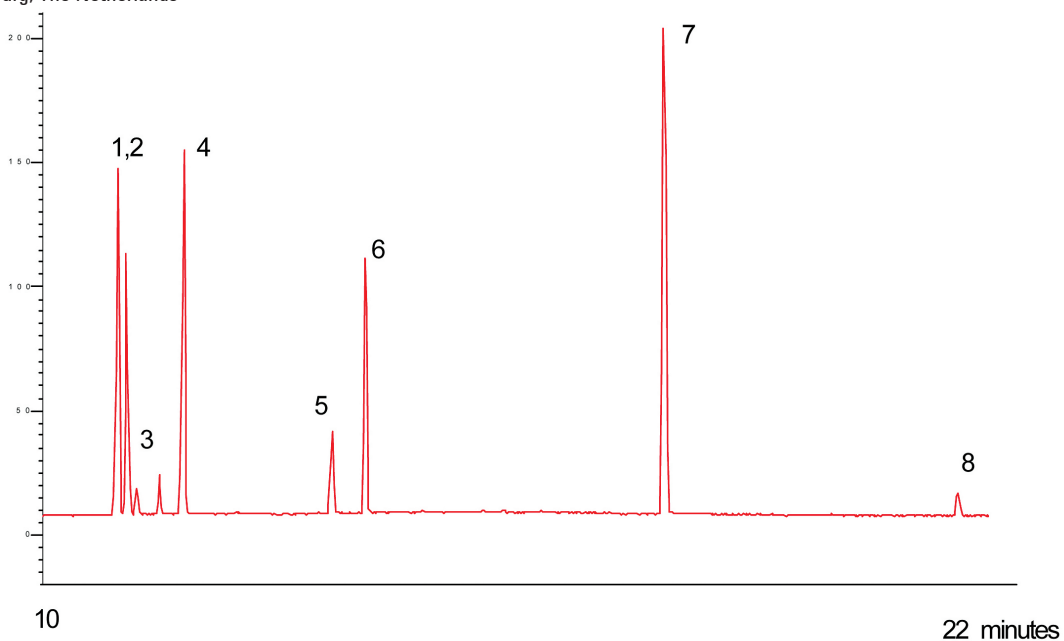

www.agilent.com/chem

This information is subject to change without notice.

© Agilent Technologies, Inc. 2011

Printed in the USA

31 October, 2011

First published prior to 11 May, 2010

A02205



Agilent Technologies