


Aroclor® PCBs
Rtx®-PCB

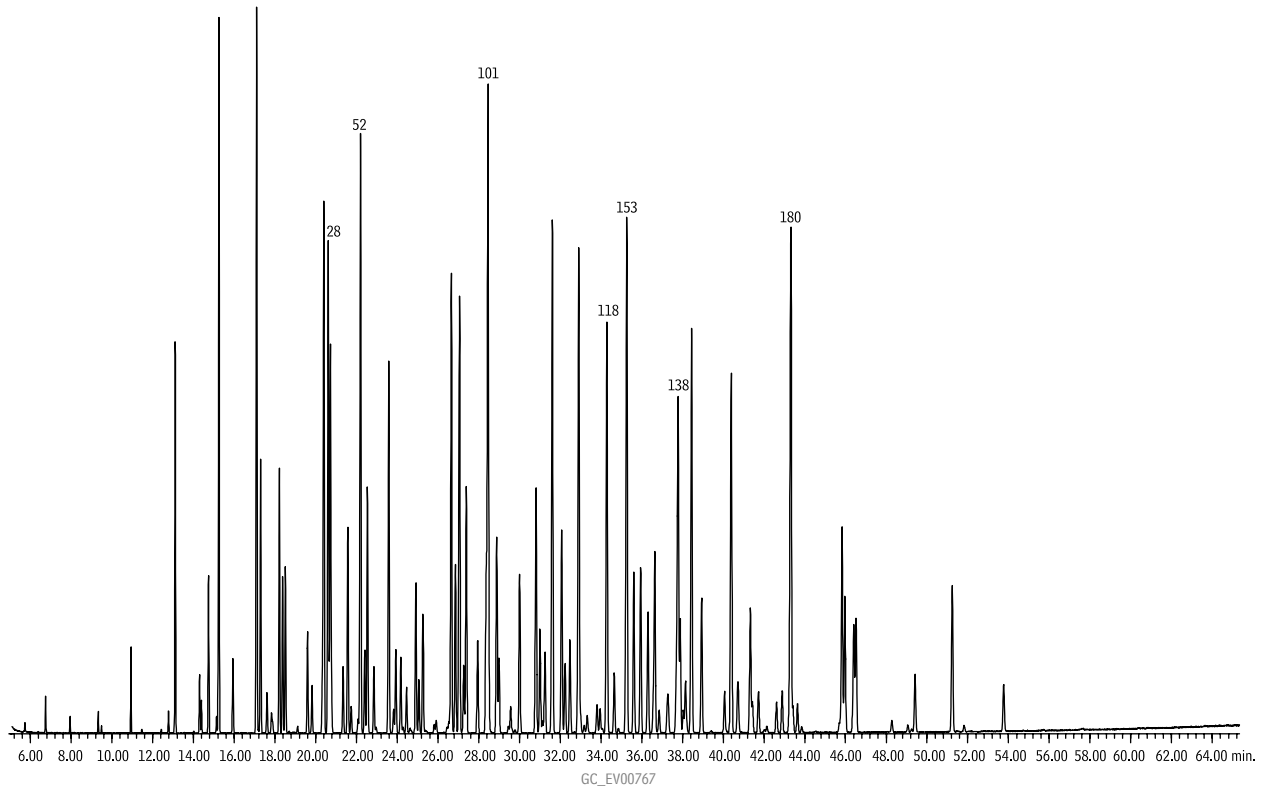

Column: Rtx®-PCB 60m, 0.25mm ID, 0.25µm (cat.# 13226)
Sample: Aroclor® 1242 (cat.# 32009), 1254 (cat.# 32011), 1262 (cat.# 32409), 333ppm each
Inj.: 1.0µL splitless (hold 0.75 min.), 4mm single gooseneck inlet liner w/ wool (cat.# 22405)
Inj. temp.: 280°C
Carrier gas: helium, constant flow
Flow rate: 1.1mL/min.
Oven temp.: 100°C (hold 1 min.) to 200°C @ 30°C/min., to 320°C @ 2°C/min. (hold 1 min.)
Det.: MS
Transfer line temp.: 280°C
Scan range: 50 to 550amu
Ionization: EI
Mode: scan