


Scotch CarboBlack™ B

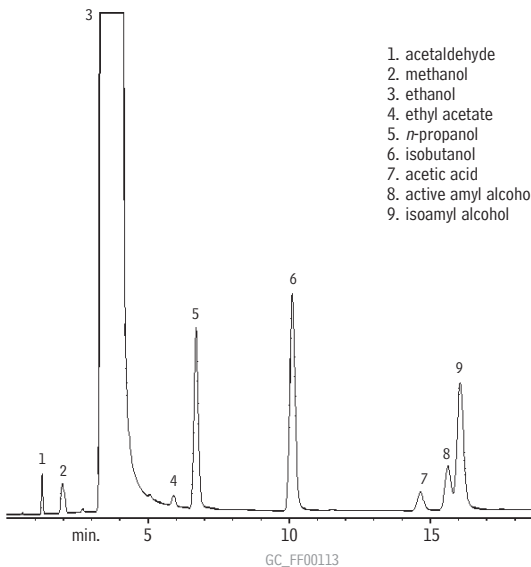

5% Carbowax® 20M 80/120 CarboBlack™ B (cat.# 80105)
2m, 1/8" OD x 2mm ID SilcoSmooth™ tubing
0.5µL on-column injection, on-column conc.: neat

Oven temp.: 70°C to 150°C @ 4°C/min.
Inj./det. temp.: 200°C / 250°C
Det.: FID
Carrier gas: nitrogen
Column flow rate: 20mL/min.
FID sensitivity: 1.28 x 10⁻¹⁰ AFS